




KONICA MINOLTA

bizhub C10/C10X FULL COLOUR_PRINTER_COPIER_SCANNER_FAX_



DO MORE FROM YOUR DESKTOP – AND DO IT BETTER. High-quality colour, printing and copying – with fast output, flexible scanning and built-in fax. The bizhub C10/C10X lets you have it all, in a network laser device that powers up your productivity at a cost you can afford. You'll have all the essential business functions at your fingertips, including fast first-print speed, customizable copy settings, 50-sheet ADF, scan-to-Email, even direct photo printing in sizes up to 8-1/2" x 11" with PictBridge connection to compatible cameras. For small businesses, departments, and branch locations, the bizhub C10/C10X is easy to set up, easy to operate – and remarkably easy on your bottom line.

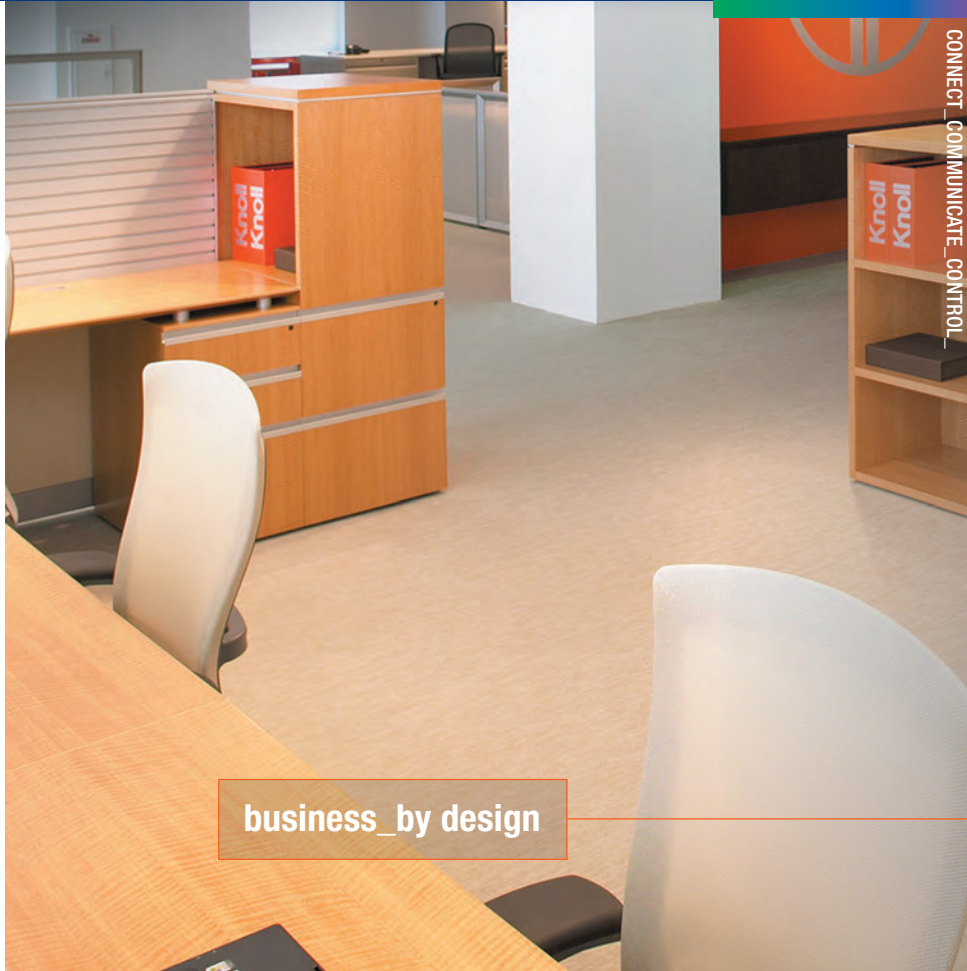

business_by design

CONNECT_COMMUNICATE_CONTROL

- ▶ PRODUCTIVE PRINT OUTPUT: 20 PPM IN B&W, 5 PPM IN COLOUR
- ▶ UP TO 35,000 PRINT-PER-MONTH DUTY CYCLE
- ▶ LASER-SHARP 2400 X 600 DPI PRINT/COPY QUALITY
- ▶ AMAZING COLOUR WITH SIMITRI® POLYMERIZED TONER
- ▶ SCAN TO EMAIL, SCAN TO PC CAPABILITIES
- ▶ SUPER G3 FAX WITH PC FAXING, ADVANCED FEATURES
- ▶ 50-SHEET AUTO DOCUMENT FEEDER TO SPEED INPUT
- ▶ DUPLEX CAPABILITY (OPTIONAL ON C10, STANDARD ON C10X)
- ▶ DIRECT CAMERA-TO-PRINTER PHOTO PRINTING
- ▶ 700-SHEET MAX. PAPER CAPACITY WITH 500-SHEET OPTIONAL TRAY
- ▶ PAGESCOPE™ WEB CONNECTION FOR DEVICE MANAGEMENT

The essentials of imaging



bizhub C10/C10X

FULL COLOUR _PRINTER _COPIER _SCANNER _FAX_

CONNECT _COMMUNICATE_ CONTROL_

General Specifications:

PRINT METHOD:	Electrophotographic Laser
PRINT SPEED:	Colour: 5 ppm, Monochrome: 20 ppm
FIRST-PAGE OUTPUT TIME:	Colour: 22 seconds, Monochrome: 13 seconds
WARM-UP TIME:	45 seconds average, 75 seconds maximum
PRINT RESOLUTION:	2400 x 600 dpi, 1200 x 600 dpi, 600 x 600 dpi
RECOMMENDED MONTHLY DUTY CYCLE:	Up to 35,000 prints
COPY SPEED:	Colour: Up to 5 cpm, Monochrome: Up to 20 cpm
FIRST COPY OUTPUT TIME:	Colour: 23 seconds, Monochrome: 52 second
COPY RESOLUTION:	600 x 600 dpi
COPY SETTINGS:	Contrast (Light/Dark), Reduce/Enlarge (50-200%), Collate, Number of Copies (1-99), Quality (Text/Photo/Mix/Normal/Fine), Duplex, 2-in-1
SCANNER TYPE:	Flatbed
SCAN SPEED (600 x 300 dpi):	Colour: 10 seconds/page, Monochrome: 4 seconds/page
SCAN RESOLUTION:	600 x 600 dpi, 600 x 300 dpi
COLOUR DEPTH:	24 bit
SCAN BED (PLATEN) SIZE:	Up to 8.5" x 14"
SCAN DESTINATION:	Scan-to-PC (USB), Scan-to-Email (Ethernet); SMTP Authentication Support
SCAN DRIVERS:	TWAIN, WIA (Windows only)
SCAN UTILITIES:	LinkMagic, PageScope Workware (optional)
SCAN FILE TYPES:	PDF, JPEG, TIFF, BMP
AUTOMATIC DOCUMENT FEEDER:	50 sheets, up to 8.5" x 14"
FAX SPEED:	33.6 Kbps Super G3
FAX MEMORY:	4 MB
AUTO REDUCTION:	Yes
SPEED DIALS:	100
ONE-TOUCH DIALS:	9
GROUP DIAL:	9 groups, 50 stations/group
BROADCAST:	125 stations
TYPEFACES:	Compatible with Windows and/or TrueType fonts printed via GDI, One resident typeface included

Hardware and Software Capabilities:

MEMORY:	160 MB DDR SDRAM on board
OPERATING SYSTEM COMPATIBILITY:	Windows Vista, Windows Server 2003, Windows XP, Windows 2000, Windows XP 64, Windows Server 2003 64, Mac 10.2.8 or later
COLOUR SUPPORT:	Enhanced Automatic Image Density Control (eAIDC)
PRINTER MANGEMENT:	PageScope Web Connection, PageScope Net Care, LSU (Local Setup Utility), HP Web JetAdmin Plug-in
PC FAX:	Send and receive digital faxes with FaxTalk Communicator

Host System Requirements and Interface Support:

MAC:	Power Mac G3, 256 MB Free Space, 1x or faster CD-ROM/DVD Drive
PC:	333 MHz Celeron, 128 MB RAM, 128 MB free disk space, CD-ROM/DVD Drive
STANDARD:	Built-in 10/100BaseTX Ethernet, High Speed USB 2.0 (Supports Microsoft Plug and Play), USB 1.1 Host Port (for Camera Direct Photo Print)
ETHERNET PROTOCOLS:	LPD, IPP v1.1, HTTP, SMTP Authentication, Bonjour, MIB, DNS, DDNS, SNMP

Media Handling:

PAPER INPUT:	200-sheet multipurpose tray (standard), 500-sheet lower feeder (optional)
STANDARD PAPER OUTPUT:	100-sheet face-down output tray
OPTIONAL AUTOMATIC DUPLEXER:	For two-sided printing and copying (standard on C10X)
PAPER SIZES SUPPORTED:	200-sheet standard multipurpose tray: 3.62" x 5.83" to 8.5" x 14", 500-sheet lower feeder (optional): 8.5" x 11", Duplexer: 8.5" x 11" or 8.5" x 14"
PRINTABLE AREA:	0.16" from all edges, 13.2" colour and 13.7" monochrome guaranteed print length
PAPER WEIGHTS:	Plain Paper: 16-24 lb. Bond, Thick Stock: 24-90 lb. Index (multipurpose tray only), Automatic Document Feeder: 16-32 lb. Bond, Automatic Duplexer: 16-24 lb. Bond
PRINT MEDIA:	Plain Paper, Thick Stock, Glossy Stock, Transparencies, Laser Quality Labels, Envelopes, Postcards

Physical:

TYPE:	Colour laser all-in-one with internal controller
DIMENSIONS (W x D x H):	20.8" x 23.1" 20.9"
WEIGHT:	70.5 lbs
POWER REQUIREMENTS:	120 VAC, 50/60 Hz
POWER CONSUMPTION:	Operating: 450 W (colour) / 600 W (monochrome) average, 1100 W maximum, 250 Watts (Standby)
ENERGY STAR COMPLIANT:	28 Wh or less
TEMPERATURE REQUIREMENTS:	Operating: 50° to 95° F (10° to 35° C), Non-Operating: 32° to 95° F (0° to 35° C)
HUMIDITY:	Operating: 15% to 85% RH, Non-Operating: 10% to 85% RH
NOISE LEVELS:	Operating: ≤57 dB(A), Standby: ≤39 dB(A)
REGULATORY/SAFETY CONFORMITY:	UL, cUL, CSA, FCC-B, CDRH, DOC, SASO, RPC

Consumables:

IN-BOX/REPLACEMENT:	Toner (yield up to 4,500 at 5% coverage)
---------------------	--



KONICA MINOLTA

bizhub

Simitri



KONICA MINOLTA BUSINESS SOLUTIONS (CANADA) LTD.

369 Britannia Road East
Mississauga, ON L4Z 2H5

www.konicaminolta.ca

© 2007 KONICA MINOLTA BUSINESS SOLUTIONS (CANADA) LTD. All rights reserved. Reproduction in whole or in part without written permission is prohibited. Konica Minolta and The essentials of imaging are trademarks of KONICA MINOLTA HOLDINGS, INC. bizhub and PageScope are trademarks of KONICA MINOLTA BUSINESS TECHNOLOGIES, INC. Simitri is a registered trademark of KONICA MINOLTA BUSINESS SOLUTIONS. All other brands and product names are registered trademarks or trademarks of their respective owners.

Design and specifications are subject to change without notice. Office imagery courtesy of Knoll, Inc.

Item #: C10SS
10/07