

bizhub 450i Black & White A3 multifunctional





Productivity

Reliability, high-speed scanning


and printing, combined with

powerful finishing functions

CUSTOMER BENEFITS



Security Secure network integration, data encryption, hard drive overwrite and advanced user authentication

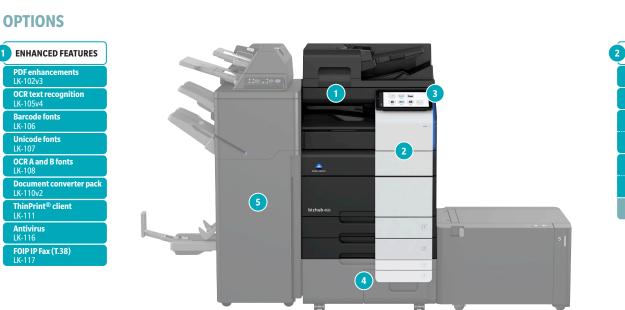

Sustainability

Numerous eco features reduce

energy consumption and costs




Application ecosystem Enhanced efficiency thanks

to Konica Minolta's extensive

applications portfolio


Services Efficient printer fleet management, including automatic consumables delivery, pro-active maintenance and remote setup



OR)

3 OTHERS Working table

WI-500
10-Key pad KP-102
Security kit SC-509
Replacement SSD EM-908
Keyboard holder

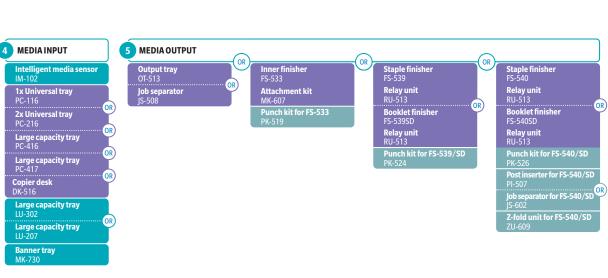

Intuitive operability

Operate the bizhub like a

smartphone or tablet with fully

customized user interface



FINISHING FUNCTIONALITIES



DESCRIPTION

3

ENHANCED FEATURES

LK-102v3 PDF enhancements	PDF/A(1b), PDF encryption, digital signature
LK-105v4 OCR text recognition	Searchable PDF and PPTX
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110v2 Document converter pack	Generates various file formats incl. DOCX, XLSX and PDF/A
LK-111 ThinPrint® client	Print data compression for reduced network impact
LK-116 Antivirus	Bitdefender® antivirus provides real time scanning of all incom-
	ing and outgoing data
LK-117 FOIP activation	Fax over IP networks (T.38), requires fax kit

Super G3 fax, digital fax functionality

USB keyboard connection; Bluetooth

USB keyboard connection

Various ID card technologies

Installation kit for ID card reader

Finger vein scanner

Wireless LAN and wireless LAN Access Point Mode

1,500 + 1,000 sheets, 5.5" x 8.5" or 8.5" x 11" / 52-256 g/m² PC-417 Large capacity tray 3,000 sheets, 8.5" x 11" / 52–256 g/m² $\,$ LU-302 Large capacity tray 2,500 sheets, 8.5" x 11" – 12" x 18" / 52–256 g/m² LU-207 Large capacity tray MK-730 Banner tray Multipage banner feeding MEDIA OUTPUT OT-513 Output tray Output tray used instead of finisher JS-508 Job separator Separation of fax output; etc. FS-533 Inner finisher 50-sheet stapling, 500 sheets max. output MK-607 Attachment kit For FS-533 installation PK-519 Punch kit for FS-533 2/3-hole punching, auto switching FS-539 Staple finisher 50-sheet stapling; 3,200 sheets max. output FS-539SD Booklet finisher 50-sheet stapling; 20 sheets booklet finisher; 2,200 sheets max. output PK-524 Punch kit for FS-539/SD 2/3-hole punching; auto switching FS-540 Staple finisher 100 sheets stapling; 3,200 sheets max. output FS-540SD Booklet finisher 100-sheet stapling; 20 sheets booklet finisher; 2,700 sheets max. output PK-526 Punch kit for FS-540/SD 2/3-hole punching; auto switching RU-513 Relay unit For FS-539/SD or FS-540/SD installation

Separation of fax output; etc.

Cover insertion; post finishing

Z-fold for 11" x 17" prints

2x 500 sheets, 5.5" x 8.5" - 11" x 17" / 52-256 g/m²²

2,500 sheets, 8.5" x 11" / 52-256 g/m²

CONNECTIVITY

FK-514 Fax board

UK-221 Wireless LAN

EK-608 USB I/F kit

EK-609 USB I/F kit

MK-735 Mount kit

ID card reader

AU-102 Biometric authentication

OTHERS	
WT-506 Working table	Authentication device placement
KP-102 10-Key pad	For use instead of touchscreen
SC-509 Security kit	Copy guard function
EM-908 Replacement SSD	1 TB SSD to increase storage space
KH-102 Keyboard holder	To place USB keyboard

MEDIA INPUT

IM-102 Intelligent media sensor	Auto detects paper weight and type
PC-116 1x Universal tray	500 sheets, 5.5" x 8.5" - 11" x 17" / 52-256 g/m

TECHNICAL SPECIFICATIONS

System speed 8.5" x11"	Up to 45 ppm
System speed 11" x 17"	Up to 22 ppm
Autoduplex speed 8.5" x11"	Up to 45 ppm
1st page out time 8.5" x11"	3.8 sec.
Warm-up time	Approx. 15 sec. ¹
Imaging technology	Laser
Toner technology	Simitri [®] HD polymerized toner
Panel size/resolution	10.1" / 1024 x 600
System memory	8,192 MB (standard/max)
System hard drive	256 GB SSD (standard) / 1 TB SSD (optional)
Interface	10/100/1,000-Base-T Ethernet; USB 2.0;
	Wi-Fi 802.11 b/g/n/ac (optional)
Network protocols	TCP/IP (IPv4/IPv6); SMB; LPD; IPP; SNMP; HTTP(S)
Automatic document feeder	Up to 300 originals; A6–A3; 35–210 g/m ² ; Dual scan ADF
ADF double feed detection	Standard
Printable paper size	3.5" x 5.5" - 12" x 18" / customized paper sizes /
	banner paper max. 47.2" x 11.7"
Printable paper weight	52-300 g/m ²
Paper input capacity	1,150 sheets / 6,650 sheets (standard/max)
Paper tray input (standard)	1 x 500 /3.5" x 5.8" – 11" x 17" / custom sizes / 52–256 g/m²
	1 x 500 / 5.5" x 8.5" - 12" x 18" / custom sizes / 52-256 g/m ²
Paper tray input (optional)	1 x 500 / 5.5" x 8.5" – 11" x 17" / 52–256 g/m²
	$2 x 500 / 5.5" x 8.5" - 11" x 17" / 52 - 256 g/m^2$
	1 x 2,500 / 8.5" x 11" /52-256 g/m²
	1 x 1,500 + 1 x 1,000 sheets / 5.5" x 8.5" or 8.5" x 11" /
	52-256 g/m ²

Large capacity tray (optional)	1 x 3,000 / 8.5" x 11" / 52–256 g/m ²
	1 x 2,500/ 8.5" x 11" - 12" x 18" / custom sizes /
	52–256 g/m ²
Manual bypass	150 sheets / 3.5" x 5.5" - 12" x 18" / custom sizes /
	banner / 60-300 g/m²
Finishing modes (optional)	Offset; Group; Sort; Staple; Staple (offline); Punch; Half-fold;
	Letter-fold; Booklet; Post insertion; Z-fold
Automatic duplexing	4.1" x 5.5" - 12" x 18" / 52-256 g/m ²
Output capacity	Up to 250 sheets / up to 3,300 sheets (standard/max)
Stapling	Max. 100 sheets or 98 sheets + 2 cover sheets (up to 300 g/m^2)
Stapling output capacity	Max. 200 sets
Tri-fold	Max. 3 sheets
Tri-fold capacity	Max. 50 sets; unlimited (without tray)
Booklet	Max. 20 sheets or 19 sheets + 1 cover sheet (up to 300 g/m^2)
Booklet output capacity	Max. 35 booklets; unlimited (without tray)
Duty cycle (monthly)	Rec. 40,000 pages; Max. ² 200,000 pages
Toner lifetime	Black up to 24,000 pages
Imaging unit lifetime	Black up to 260,000/1,000,000 pages (drum/developer)
Power consumption	110-120 V / 60 Hz, Less than 1.6 kW
System dimension (W x D x H)	24.2" x 27.1" x 37.8" (without options)
System weight	Approx. 220 lb (without options)

JS-602 Job separator for FS-540/SD

PI-507 Post inserter for FS-540/SD

ZU-609 Z-fold unit for FS-540/SD

MEDIA INPUT

PC-216 2x Universal tray

PC-416 Large capacity tray

bizhub 450i Datasheet

PRINTER SPECIFICATIONS

4

Print resolution	1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi
Page description language	PostScript 3 (CPSI 3016); PCL 6 (XL3.0); PCL 5c; XPS
Operating systems	Windows 7 (32/64); Windows 8.1 (32/64); Windows 10 (32/64);
	Windows Server 2008 (32/64); Windows Server 2008 R2;
	Windows Server 2012; Windows Server 2012 R2;
	Windows Server 2016; Windows Server 2019;
	Macintosh OS X 10.10 or later; Linux
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Mobile printing	Konica Minolta Print Service (Android);
	Konica Minolta Mobile Print (iOS/Android);
	AirPrint (iOS); Mopria (Android)
	optional: WiFi Direct

SCANNER SPECIFICATIONS

Scan speed	Up to 140 ipm in simplex (mono)
	Up to 280 ipm in duplex (mono)
Scan resolution	Up to 600 x 600 dpi
Scan modes	Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home);
	Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV;
	Scan-to-DPWS; Scan-to-URL; TWAIN scan
File formats	JPEG; TIFF; PDF; Compact PDF; Encrypted PDF; XPS; PPTX
	optional: Searchable PDF; PDF/A 1a and 1b;
	Searchable DOCX/PPTX/XLSX
Scan destinations	2,000 destinations + 100 groups; LDAP support

COPIER SPECIFICATIONS

Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1–9,999
Original format	Max. 11" x 17"
Magnification	25–400% in 0.1% steps; Auto-zooming

FAX SPECIFCIATION

Fax standard	Super G3 (optional)
Fax transmission	Analog; i-Fax; Color i-Fax; IP-Fax
Fax resolution	Up to 600 x 600 dpi
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	2,000 single + 100 groups



For complete information on Konica Minolta products and solutions, please visit: **www.konicaminolta.ca**

© 2020 KONICA MINOLTA BUSINESS SOLUTIONS (CANADA) LTD. All rights reserved. Reproduction in whole or in part without written permission is prohibited. KONICA MINOLTA and the KONICA MINOLTA logo are registered trademarks or trademarks of KONICA MINOLTA, INC. All other product and brand names are trademarks or registered trademarks of their respective companies or organizations. All features and functions described here may not be available on some products. Design and specifications are subject to change without notice.

Storable documents	Up to 3,000 documents or 10,000 pages
Type of user boxes	Public; Personal (with password or authentication);
	Group (with authentication)
Type of system boxes	Secure print; Encrypted PDF print; Fax receipt; Fax polling
SYSTEM FEATURES	
Security	ISO 15408 HCD-PP Common Criteria (in evalutation);
	IP filtering and port blocking; SSL3 and TLS1.0/1.1/1.2 network
	communication; IPsec support; IEEE 802.1x support;
	User authentication; Authentication log; Secure print; Kerberos;
	Hard drive overwrite; Hard drive data encryption (AES 256);
	Confidential fax; Print user data encryption
	optional: Antivirus realtime scanning (Bitdefender®);
	Copy protection (Copy Guard, Password Copy)
Accounting	Up to 1,000 user accounts; Active Directory support (user name
	password + e-mail + smb folder); User function access definition
	Authentication by mobile device (Android)
	optional: Biometric authentication (finger vein scanner);
	ID card authentication (ID card reader);
	Authentication by mobile device (iOS)
Software	Net Care Device Manager; Data Administrator; Box Operator;
	Web Connection; Print Status Notifier; Driver Packaging Utility;
	Log Management Utility

¹ Warm-up time may vary depending on the operating environment and usage

² If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

- All specifications refer to 8.5" x 11"-size paper of 80 g/m² quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of 8.5" x 11"). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
 All brand and product pames may be registered trademarks or trademarks of their respective hold.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.



www.konicaminolta.ca

f 🖌 🔊 in 🞯

KONICA MINOLTA BUSINESS SOLUTIONS (CANADA) LTD. 5875 Explorer Drive, Suite 100, Mississauga, Ontario L4W 0E1



Item #: 450iSS 10/2020-8