




KONICA MINOLTA

TECHNOLOGY

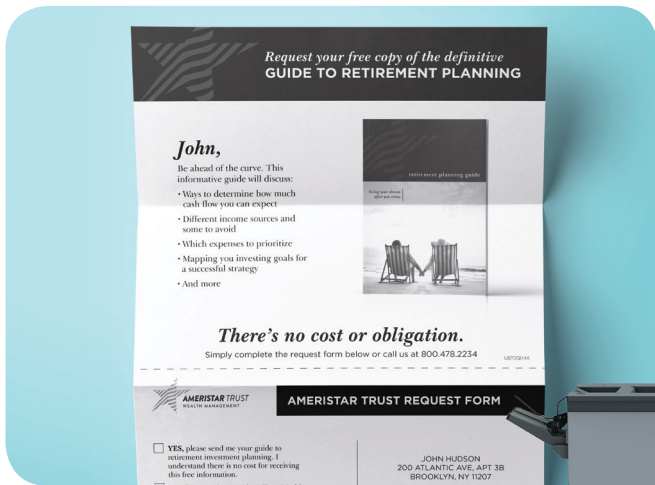

AccurioPress 6136P

MONOCHROME DIGITAL PRODUCTION PRESS

- 136 ppm output for high-volume monochrome print production
- Inline, closed loop quality management system
- Job ticket and page editing from 15" touch-screen display for easy on-board press control
- Color Centro and Hot Folder capabilities for job management and workflow
- True 1200 x 1200 dpi resolution with enhanced screening technologies for sharpness
- Duty cycle 3,240,000 — accepts media up to 350 gsm
- Reliable air-suction paper feed option for smooth paper feeding
- Professional feeding of coated media and envelopes
- 18,000-sheet maximum paper capacity with options

- Humidifier option removes static, reduces paper curl
- Saddle-stitched booklets with three-side trim and square-fold
- Produce 600-page perfect bound books and up to 100-sheet stapling
- Envelope print support with optional fuser
- Innovative GBC punch unit with interchangeable die sets
- Built-in print controller with PCL, PostScript, TIFF and PDF
- Simitri® HD toner with biomass to protect the environment
- EPEAT Gold-certified and ENERGY STAR compliant

AccurioPress 6136P

MONOCHROME DIGITAL PRODUCTION PRESS

The AccurioPress 6136P means business with up to 136 ppm print output, a monthly duty cycle of over three million impressions and up to 18,000-sheet capacity. With real-time automated density and registration adjustments and powerful multiple inline finishing options, it gives you all the tools you need to grow your business.

SYSTEM SPECIFICATIONS

Resolution	Print: 1200 x 1200 dpi
Paper weight	Standard: 40–300 gsm Opt.: PF-710, PF-709 (middle tray): 40–350 gsm
Auto duplex	40–300 gsm
Paper sizes (max.)	324 x 463 mm (12.76" x 18.23") Opt.: PF-709: 324 x 463 mm (12.76" x 18.23") PF-710: 324 x 483 mm (12.76" x 19.02")
Paper sizes (min.)	182 x 139 mm (7.17" x 5.47") Opt.: PF-709: 95 x 139 mm (3.74" x 5.47") PF-710: 95 x 133 mm (3.74" x 5.24")
Image loss (max.)	3.0 mm or less for top edge 2.0 mm or less for bottom edge 2.0 mm or less for right/left edges
Warm-up time	420 seconds or less
Paper input capacity	Standard: 3,000 sheets Max.: 18,000 sheets
Main unit dimensions (W x D x H)	39" x 35.8" x 57"
Main unit weight	761 lb
Power requirements	208 VAC to 240 VAC, 20 A, 60 Hz

PRODUCTIVITY

8.5" x 11" (max. per minute)	136 ppm
Monthly duty cycle (max.)	3,240,000 pages

CONTROLLER

Type	Embedded (network standard)
CPU	Intel i5-4570S 2.9 GHz
Memory	16 GB
HDD/SSD	HDD: 1-TB x2, SSD: 4 GB
Print-description language	PCL SE/XL (PCL 6), Adobe PostScript 3 (PS3020), PDF v1.7, TIFF v6, PPML v2.2, APPE 4.2 (with UK-217)
Printing method	TCP/IP (LPR, RAW socket), NetBEUI, IPP, WSD, Bonjour, SMB
Applicable OS	PCL, PS, PS Plug-in: Windows 7 ^{*1} /8.1 ^{*1} /10 ^{*1} Windows Server 2008/2008 R2/2012/2012 R2/2016 Mac OS X 10.8 /10.9/10.10/10.11/10.12
Interface	10/100/1000BASE-T, USB 3.0 host, USB 2.0 device

^{*1} Including 64-bit versions.

OPTIONS

CR-101	Creaser unit for SD-513
EF-105	Envelope fuser
FA-503	PFU adjustment kit
FD-503	Multi-fold punch unit
FD-504	Square folding unit for SD-513
FS-532	100-sheet staple finisher
FS-532 PK/SD	100-sheet staple finisher with PK and SD-510-522
Punch G2	GBC advanced multi-punching unit
GP-501	GBC multi-hole punch unit
GP-502	GBC inline ring binding unit
HD-523	Inner HDD kit
HM-103	Humidification unit for RU-518
HT-506	Dehumidification heating unit for PF-710
IQ-501	Intelligent quality optimizer
LC-501	Cart for LS-506
LS-506	Stacking unit

MK-732	Post-inserter mount kit for FS-532
MK-737	Mount kit for third-party products
OT-510	Open stacker
PB-503	Perfect binder
PF-709	Friction paper feed unit with air assist
PP-701	Preprinted paper kit for PF-709
PF-710	Vacuum paper feed unit
PI-502	Post inserter for FS-532
PK-522	2/3-hole punch for FS-532
RH-101	Removable HDD kit
RU-510	Relay unit for GP-501
RU-518	Relay unit for de-curling
SD-506	Booklet-making unit
SD-510	Saddle-stitch kit for FS-532
SD-513	Saddle-stitch unit
SD-513/F	Saddle-stitcher front
TU-503	Trimmer unit for SD-513



For complete information on Konica Minolta products and solutions, please visit: www.konicaminolta.ca

© 2018 KONICA MINOLTA BUSINESS SOLUTIONS (CANADA) LTD. All rights reserved. Reproduction in whole or in part without written permission is prohibited. KONICA MINOLTA and the KONICA MINOLTA logo are registered trademarks or trademarks of KONICA MINOLTA, INC. All other product and brand names are trademarks or registered trademarks of their respective companies or organizations. All features and functions described here may not be available on some products. Design and specifications are subject to change without notice.



KONICA MINOLTA

KONICA MINOLTA BUSINESS SOLUTIONS (CANADA) LTD.
5875 Explorer Drive, Mississauga, ON L4W 0E1

www.konicaminolta.ca



Item #: AP6136PSS
03/2018-C